

REGISTER
FOR DISCOUNTED PRICING!
www.aimsupply.com



METAL FABRICATION



Random Orbital Sanders

	Type	Pad Size	Orbit
PPT DA500	Standard	5"	3/16"
PPT DA501	Standard	5"	3/32"
PPT DA5500	Composite	5"	3/16"
PPT DA5501	Composite	5"	3/32"
PPT DA600	Standard	6"	3/16"
PPT DA601	Standard	6"	3/32"
PPT DA6600	Composite	6"	3/16"
PPT DA6601	Composite	6"	3/32"



- Engineered to provide power and performance to get the job done with better results • Each tool comes ready to use and is perfectly balanced with a low-profile back-up pad to provide a smooth, consistent finish and greater operator comfort
- 12,000 RPM • Low profile ergonomic design • 1 year FREEmaintenance on all Performance 1 products!



DYN 56106

PSA Vinyl (Blue) Disc Pads

Premium urethane pads, available in soft or medium density, resist heat build-up. Special rubber/vinyl face pads for PSA discs. 5" diameter disc pads have 5/16" – 24 male threaded stud.



Replacement Sanding Pads

Part No.	Diameter	Facing	Thread Size	Max. RPM
FER 5115	5"	PSA	5/16" x 24	12,000
FER 5215	5"	PSA	5/16" x 24	12,000


Firm, low profile urethane molded pad with a heavy duty riveted composite hub.

Part No.	Diameter	Facing	Thread Size	Max. RPM
FER 5135	5"	PSA	5/16" x 24	12,000
FER 5235	5"	Hook	5/16" x 24	12,000

Medium edge urethane molded pad that is firm enough for flat surfaces, yet soft enough for curved surfaces. Designed with a heavy duty riveted composite hub

Part No.	Diameter	Facing	Thread Size	Max. RPM
FER 55115	5"	PSA	5/16" x 24	12,000
FER 54285	5"	Hook	5/16" x 24	12,000

Firm, low profile urethane molded pad with a heavy duty riveted composite hub and standard hole pattern for vacuum assist sanding.



Standard Caulking Gun

- 10 oz. Sausage and 10.3 oz. Cartridge
- Pre-Configured for Sausage Application • Plunger Included for Cartridge Application • Mechanical Advantage 12:1 • Switchable Flow Control • Plunger Extension - Reduces Waste • Wear Compensating Device • Drawn Aluminum Barrel • Interchangeable Pull Handle
- Quick Release End Cap • All Component Replaceable Parts
- Includes Two White Cone Nozzles, Spare Sausage Plunger, Ladder Hook and Spanner Wrench

COX 51000

Open Body Heavy-Duty Caulking Gun

COX 41001-R



AIM 100 Series Silicone Sealant

- It cures to silicone rubber and adheres to glass, wood, metal, porcelain, ceramic, painted surfaces, fiberglass, many plastics and rubber
- Permanently flexible -60°F to 450°F • Insulates thermally and electrically
- Waterproof and weatherproof seal • Screw-on Top

AIM 100-00	Clear
AIM 100-01	White
AIM 100-02	Black
AIM 100-03	Aluminum
AIM 100-05	Almond



Silicone Adhesive/Sealant

Mildew Resistant • 100% RTV with Screw-on Top

- Approved for cultured marble • Excellent adhesion to glass
- Window and door approved • Non sag & slump • 75 year durability • Quick curing • Consistent Gunability • 10.1oz

AIM 200-00	Clear
AIM 200-01	White
AIM 200-02	Black
AIM 200-03	Aluminum
AIM 200-05	Almond
AIM 200-06	Translucent Clear



Sikaflex® 221

- Sikaflex-221 is a high-quality multi-purpose non-sag 1-c polyurethane sealant that cures on exposure to atmospheric humidity to form a durable elastomer
- Sikaflex-221 bonds well to a wide variety of substrates and is suitable for making permanent elastic seals of high adhesive strength. Suitable substrate materials are wood, metals, metal primers and paint coatings (2-c systems), ceramic materials and plastic

SIK 221-A	10.3oz (300ml) Tube Aluminum
SIK 221-B	10.3oz (300ml) Tube Black
SIK 221-W	10.3oz (300ml) Tube White
SIK 221-201	20oz Sausage Fast Set White



Sikaflex® 3131S

- SikaFast 3131 by Sika is a 10:1 two part structural adhesive designed as a substitute for (or complement to) welding, riveting, clinching and other mechanical fastening techniques
- SikaFast-3131 is suitable for bonding panels; roofs, floors and parts made of aluminum, stainless or galvanized steel and fiber-reinforced polymers

SIK 3131S

Sika Static Mixing Nozzle (SIK-31001SM) is required to properly dispense and mix this product



Sikaflex® 291

- Sikaflex-291 is a 1-component, marine grade polyurethane elastomeric adhesive and sealant. Used by many boat builders, its fast cure time makes it ideal for applications where speed is important.
- General all-purpose marine sealant, which may be used for light duty bonding.
- Use above and below water line • Resists salt water • Fast strength build-up
- Excellent adhesion to gelcoat, fiberglass, metal and wood • Sandable and paintable • Excellent bond • Fast tack-free time • High solids content

SIK 291-B	10.3oz (300ml) Tube Black
SIK 291-W	10.3oz (300ml) Tube Aluminum
SIK 291-U	20oz (600ml) Sausage White



NORTON Anti-Load Resin Papers

CORAGlobal™ PB273 anti-load resin paper has been designed to provide a consistent finish, faster cut rate, extended life, improved resistance to delamination and can be used moist or wet. Additionally, these discs have been engineered to improved load resistance on broad range of substrates and have no risk of color transfer, with a stronger bond, creating an excellent finish.

- P-graded • Sharp light brown grain
- Premium B-weight latex high internal bond paper backing
- Newest water based stearate oversize
- No pigment in anti-load oversize or bond

CoraGlobal™ – Designed Specifically For The Composite Industry

NTN 666233-62930	5" 80 Grit Cora PSA	100/Roll
NTN 666233-62929	5" 120 Grit Cora PSA	100/Roll
NTN 666233-62926	5" 220 Grit Cora PSA	100/Roll
NTN 666233-62924	5" 320 Grit Cora PSA	100/Roll
NTN 666233-62923	5" 400 Grit Cora PSA	100/Roll
NTN 666233-62922	5" 600 Grit Cora PSA	100/Roll
NTN 666233-62921	5" 800 Grit Cora PSA	100/Roll

Features:

- Premium P-grade, heat treated aluminum oxide abrasive
- Unique fiber-reinforced, B-weight latex-saturated backing
- Water-based stearate, non-pigmented, no-fill coating
- Superior life, fast cut rate, consistent finish

Benefits:

- 50-60% improvement in tear strength
- Flexible—can be used wet
- Provides maximum load resistance and extended life; no color transfer to work

No-Fil Magnum A275 – The Performance Leader In Dry Finishing Discs

NTN 662611-31449	Disc 5 PSA A275 P1200-B	100/Box
NTN 662611-31450	Disc 5 PSA A275 P1000	100/Box
NTN 662611-31451	Disc 5 PSA A275 P800	100/Roll
NTN 662611-31452	Disc 5 PSA A275 P600	100/Roll
NTN 662611-31453	Disc 5 PSA A275 P500-B	100/Roll
NTN 662611-31454	Disc 5 PSA A275 P400	100/Roll
NTN 662611-31456	Disc 5 PSA A275 P320	100/Roll
NTN 662611-31457	Disc 5 PSA A275 P280-B	100/Roll
NTN 662611-31458	Disc 5 PSA A275 P240-B	100/Roll
NTN 662611-31459	Disc 5 PSA A275 P220-B	100/Roll
NTN 662611-31460	Disc 5 PSA A275 P180-B	100/Roll
NTN 662611-31461	Disc 5 PSA A275 P150-B	100/Roll
NTN 662611-31462	Disc 5 PSA A275 P120	100/Roll
NTN 662611-31463	Disc 5 PSA A275 P100-B	100/Roll
NTN 662611-31464	Disc 5 PSA A275 P80	100/Roll

ALSO AVAILABLE IN HOOK & LOOP



Premier Red Aluminum Oxide Dri-Lube Resin Paper Open Stick-on Discs

- 30% to 50% faster cut rate
- Uniform scratch pattern
- Superior resistance to delamination and tearing; industry's longest disc life
- P-graded, heat-treated aluminum oxide abrasive
- B-weight PSA paper backing • Special undyed stearate oversize

CM 18105	5" Link Disc Roll (Grade P400-Red)	100/Roll
CM 18106	5" Link Disc Roll (Grade P320-Red)	100/Roll
CM 18110	5" Link Disc Roll (Grade P180-Red)	100/Roll
CM 18111	5" Link Disc Roll (Grade P150-Red)	100/Roll



3/16" Heavy-Duty Air Power Riveter

- Comes equipped with 1/4", 7/32", 3/16", 5/32", 1/8" and 3/36" nose pieces
- Quick release air valve permits quick cylinder return
- Requires only 75-85 PSI for operation
- Ideal for automotive repair, metalworking shops, mobile home builders and other similar jobs

ATD 5850

1/4" Heavy-Duty Air Power Riveter

ATD 5842




Hand Operated Hydraulic Riveter

- The HK150-A Kit consists of a manually operated, hydraulically powered installation tool and inserts for a variety of rivets
- Sets 3mm through 3/8-24 TSN(r) style threaded inserts in steel or aluminum
- Up to 3500 lbs. of power
- Sets aluminum, steel and stainless steel rivets through 1/4"
- Weight: 18oz, Stroke: .63"



HUK HK-150A

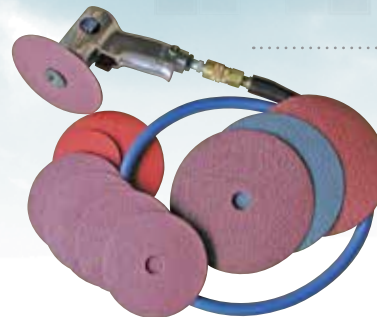

Resin Fiber and Trim-Kut® Grinding & Sanding Discs

Part Number	Disc Size	Quantity	Price
GRIT TRIM-KUT			
BAR 320024	Disc 3" 24 grit trim-kut		25/box
BAR 320036	Disc 3" 36 grit trim-kut		25/box
BAR 320060	Disc 3" 60 grit trim-kut		25/box
GRIT A/O TYPE C			
BAR 510016	Disc 5" x 7/8" 16 grit A/O type C		25/box
BAR 510024	Disc 5" x 7/8" 24 grit A/O type C		25/box
BAR 510036	Disc 5" x 7/8" 36 grit A/O type C		25/box
BAR 510050	Disc 5" x 7/8" 50 grit A/O type C		25/box
BAR 510060	Disc 5" x 7/8" 60 grit A/O type C		25/box
BAR 510080	Disc 5" x 7/8" 80 grit A/O type C		25/box
GRIT PREMIUM A/O TYPE A			
BAR 511016	Disc 5" x 7/8" 16 grit premium A/O type A		25/box
BAR 511024	Disc 5" x 7/8" 24 grit premium A/O type A		25/box
BAR 511036	Disc 5" x 7/8" 36 grit premium A/O type A		25/box
BAR 511050	Disc 5" x 7/8" 50 grit premium A/O type A		25/box
GRIT A/O TYPE C			
BAR 710016	Disc 7" x 7/8" 16 grit A/O type C		25/box
BAR 710024	Disc 7" x 7/8" 24 grit A/O type C		25/box
BAR 710036	Disc 7" x 7/8" 36 grit A/O type C		25/box
BAR 710050	Disc 7" x 7/8" 50 grit A/O type C		25/box
BAR 710080	Disc 7" x 7/8" 80 grit A/O type C		25/box
GRIT PREMIUM A/O TYPE A			
BAR 711016	Disc 7" x 7/8" 16 grit premium A/O type A		25/box
BAR 711024	Disc 7" x 7/8" 24 grit premium A/O type A		25/box
BAR 711036	Disc 7" x 7/8" 36 grit premium A/O type A		25/box
SILICONE/CARBIDE			
BAR 712016	Disc 7" x 7/8" 16 grit silicone/carbide		25/box
GRIT ZIRCONIA			
BAR 713024	Disc 7" x 7/8" 24 grit zirconia		25/box
BAR 713036	Disc 7" x 7/8" 36 grit zirconia		25/box

NEW! Silver Cut-Off Wheels 3M

- Designed to quickly cut through metal pipes, tubes flat sheets and more
- Exceptional durability extends the life of the wheel for great performance value
- Precision-shaped Grain cuts exceptionally fast, helping increase productivity
- May be used on a variety of substrates such as carbon steel and stainless steel

3MI 87458 T1, 3" x .035" x 3/8"

3MI 87466 T27, 4.5" x .045" x 7/8"

3MI 87462 T1, 4" x .060" x 3/8"

3MI 87469 T1, 6" x .045" x 7/8"

3MI 87465 T1, 4.5" x .045" x 7/8"

NEW! Silver Depressed Center Grinding Wheels

- Designed for heavy grinding, beveling and weld removal
- May be used on a variety of substrates such as carbon steel and stainless steel

3MI 87397 T27, 4.5" x 1/4" x 5/8-11"

3MI 87453 T27, 4.5" x 1/4" x 7/8"

3MI 87448 T27, 7" x 1/4" x 5/8-11"

3MI 87454 T27, 5" x 1/4" x 7/8"

3MI 87449 T27, 9" x 1/4" x 5/8-11"



Cut-Off Wheels

NP 41203 3" x 1/16" x 3/8"

NP 41204 4" x 1/16" x 3/8"

NP 41203-035 3" x .035 x 3/8"

CM 07086 4" x 7/64" x 1" (F/Metal)

Depressed Center Grinding Wheel Type 27

- Gold Aluminum Oxide Abrasive • A24 Aluminum Oxide Abrasive – For Steel/Metal • The choice for grinding all types of ferrous metals and various alloy steels • Quality aluminum oxide abrasive • Fast stock removal • Advanced resin bond • Free cutting without a reduction in wheel life • Exceptional balance • No vibration • No burning of workpiece • Less grinder maintenance • Less operator fatigue • Unique glass clothreinforcement design • No fraying or spalling of abrasive grit • Maximum RPM: 13,580

CM 02837 4" x 1/4" x 5/8"

CM 02842 4-1/2" x 1/4" x 7/8"

CM 02843 4-1/2" x 1/4" x 5/8"



CARBORUNDUM ABRASIVES
NORTH AMERICA

Liquid Metal Polish & Protectant

- Removes surface contaminants while leaving behind radiant shine and coating of rust-preventing protection
- Tough on rust and stains, yet easy to use • Restores, shines AND protects in one step • For a variety of metal fittings and accessories
- Brings faded, rusted, and tarnished metal accessories and fittings back to life • NOT recommended for painted metals

CWP 850



Face Shield Safety Eye Protection

- Large guard provides excellent protection from heat, sparks, particles or any other dangerous objects

Face Shield w/ Adjustable Headband

NTH F400C

Formed Face Shield, Clear 8 x 16-1/2

NTH 4178CL

Split Conduit Hose

- Flame retardant • Black • Temperature rated to 275° F
- Provides chafing and quality appearance in marine wiring systems
- Complies with ABYC standard 8.15.19. Meets UL94 V2 standard
- High abrasion resistance

HO 128-0127B 1/2" X 100'

HO 128-0387B 3/8" X 100'

HO 128-0147B 1/4" X 100'



135° Split Point, HSS, Black & Bronze Oxide Jobber Length Drill Bits

- Black and Bronze Oxide Coating • 3-Sided Flattened Shank (on 3/16" and above)

Part Number	Size	Flute Length	Overall Length	Package Quantity
BAR DB04	1/16	7/8	1-7/8	12
BAR DB05	5/64	1	2	12
BAR DB06	3/32	1-1/4	2-1/4	12
BAR DB07	7/64	1-1/2	2-5/8	12
BAR DB08	1/8	1-5/8	2-3/4	12
BAR DB09	9/64	1-3/4	2-7/8	12
BAR DB10	5/32	2	3-1/8	12
BAR DB11	11/64	2-1/8	3-1/4	12
BAR DB12	3/16	2-5/16	3-1/2	12
BAR DB13	13/64	2-7/16	3-5/8	12
BAR DB14	7/32	2-1/2	3-3/4	12
BAR DB15	15/16	2-5/8	3-7/8	12
BAR DB16	1/4	2-3/4	4	12
BAR DB17	17/64	2-7/8	4-1/8	6
BAR DB18	9/32	2-15/16	4-1/4	6
BAR DB19	19/64	3-1/16	4-3/8	6
BAR DB20	5/16	3-3/16	4-1/2	6
BAR DB21	21/64	3-5/16	4-5/8	6
BAR DB22	11/32	3-7/16	4-3/4	6
BAR DB24	3/8	3-5/8	5	6
BAR DB25	25/64	3-3/4	5-1/8	6
BAR DB26	13/32	3-7/8	5-1/4	6
BAR DB27	27/64	3-15/16	5-3/8	6
BAR DB28	7/16	4-1/16	5-1/2	6
BAR DB29	29/64	4-1/4	5-3/4	6
BAR DB30	15/32	4-1/2	6	6
BAR DB31	31/64	4-1/2	6	6
BAR DB32	1/2	4-1/2	6-1/8	6

AIRCRAFT DRILL BITS

BAR AB07	7/64	1-1/2	6	12
BAR AB08	1/8	1-3/4	6	12
BAR AB09	9/64	1-3/4	6	12
BAR AB10	5/32	2-1/8	6	12
BAR AB11	11/64	2-1/8	6	12
BAR AB12	3/16	2-3/8	6	12
BAR AB13	13/64	2-1/2	6	12
BAR AB16	1/4	2-7/8	6	12
BAR AB20	5/16	3-1/4	6	12
BAR AB21	21/64	3-1/4	6	6
BAR AB22	11/32	3-1/2	6	6
BAR AB23	23/64	3-1/2	6	6
BAR AB24	3/8	3-1/2	6	6
BAR AB25	25/64	3-1/2	6	6
BAR AB26	13/32	3-1/2	6	6
BAR AB27	27/64	3-1/2	6	6
BAR AB28	7/16	3-1/2	6	6
BAR AB30	15/32	3-1/2	6	6
BAR AB32	1/2	3-1/2	6	6

NORTON
VORTEX
TECHNOLOGY

RAPID PREP SURFACE CONDITIONING DISCS

- New resin system, aerospace-tailored
- Smear-free, even on high nickel content alloys
- Will not load on aluminum and soft metals, as competitive products may
- Proprietary new coating method
- Thick layer of grain throughout the product extends life; grain does not sit on top of fibers as other competitive products may
- Extended form holding
- Lowest total cost of consumable tooling per workpiece
- Improved hook and loop backing
- Will not fly off rotary sanders
- Discs sit flatter on back-up pads, resulting in a more consistent finish on DA applications
- NORTON VORTEX RAPID PREP: • Proprietary Vortex aluminum oxide grain and new coating method
- Most consistent cutting and finishing of surface conditioning products on the market
- Combine the cutting speed with the finish of fine grits
- Reduce process times by 50+% by eliminating 2 to 5 grit sequences to 1 step in your technical blending operations
- More resistant to edge wear; up 4X life vs. competitive products
- Friable grain structure keeps Ra specs throughout disc life and reduces scrap and rework
- Type TR (Type III)
- Features a roll on/roll off style fastener



Part Number	Size & Grit	Type
NTN 666233-35326	2" Extra Coarse	TR
NTN 666233-35327	3" Extra Coarse	TR
NTN 666233-35414	2" Coarse	TR
NTN 666233-35417	3" Coarse	TR
NTN 666233-35427	2" Medium	TR
NTN 666233-35430	3" Medium	TR
NTN 666233-25035	2" Fine	TR
NTN 666233-25038	3" Fine	TR
NTN 666233-35433	2" Very Fine	TR
NTN 666233-35437	3" Very Fine	TR



45 Mil Premium Acrylic Foam Tape

- Double coated with an aggressive pressure-sensitive acrylic formulation, this acrylic foam tape is engineered to bond to almost any surface.
- Excellent resistance to solvents and temperature variances.
- Conforms well to curves, moves and flexes as needed on applications requiring contortion and bending characteristics.
- Intended for permanent bond of two surfaces.
- Not warranted for use as the sole means of attachment or for replacement of rivets or other hard fasteners intended for the assembly of trailers, pull-behinds, etc.

Part Number	Size	Color
AMT AFT450G-12	12MM x 33MM	Grey
AMT AFT450G-1	24MM x 33MM	Grey
AMT AFT450W-1	24MM x 33MM	White



Scotch-Brite™ Roloc™ Surface Conditioning Disc

3M

Combines durable, non-woven disc with the efficiency of the Roloc™ quick-change attachment system for an effective disc that cleans, finishes, blends, and deburrs

- Non-woven fiber construction conforms to help preserve irregular/contoured surfaces
- Roloc™ backing supports the disc for aggressive cutting
- Open-web fiber runs cool and resists loading while the abrasive provide a high cut-rate to give you consistent finishing

3MI 05528


Safety-Walk™ Slip-Resistant Medium Resilient Tape

- Resilient, non-mineral, slip-resistant material
- Soft surface is suitable for bare feet
- For locker rooms and recreational/athletic equipment, boats and docks, interior stairwells, entryways and lobbies

3MI 90654 2" x 60 ft

3MI 19296 4" x 60 ft


Also available in custom sizes and colors, and with custom adhesives

INCOM
MANUFACTURING GROUP

True Grip Contractor Grade Anti-Slip Tape

- High Traction Surface
- Aggressive Adhesive System
- Durable Abrasive Grit
- Water Resistance
- Custom Slit Widths
- Indoor Outdoor Applications
- Extreme Traction

Available in many quality levels, sizes and colors.

Also available in cleat form in a variety of sizes and colors.

TTL SG3101B

HD Safety Walk 1"x 60' Roll, Black

TTL SG7024CG

True Grip Safety Walk 24"x 60' Roll, Black


APEX
TOOL GROUP

- Bit holders, like this Apex M-490, let you use a variety of insert bits in power tool applications
- You get economy and flexibility – and fasteners can be magnetically held to the bit

APE M-490-2

Magnetic Bit Holder 2" Long

APE M-490

Magnetic Bit Holder 2 21/32" Long

APE M-490-6

Magnetic Bit Holder 6" Long



Performance 1
 Bits Outlast
 The Competition!

High Performance Driver Bits For the Ultimate In Performance and Durability

Performance 1 premium tool alloy and proprietary heat treatment help avoid typical problems such as shattering and premature bit wear

Lasting Performance

Performance 1 quality begins with the highest grade tool steel and each bit is tempered with our special heat treating process for long life and durability

Precision Fit

Every **Performance 1** bit is manufactured to strict tolerances to eliminate "cam-out" and premature bit failure and give you a precision fit every time



1/4" Drive Hex Power Drive Phillips Bit

Part No	Point Size	Overall Length		Body Diameter		Turned Length	
		In.	mm	In.	mm	In.	mm
BAR SB491-A	1	2-3/4	70	3/16	4.8	2	51
BAR SB491-C	1	6	152	3/16	4.8	2	51
BAR SB492	2	1-15/16	49	1/4	6.4	1-1/4	32
BAR SB492-A	2	2-3/4	70	1/4	6.4	2	51
BAR SB492-B	2	3-1/2	89	1/4	6.4	2-3/4	70
BAR SB492-C	2	6	152	1/4	6.4	2	51
BAR SB27371	3	6	152	1/4	6.4	2	51
BAR SB493-A	3	2-3/4	70	1/4	6.4	2	51
BAR SB493-B	3	3-1/2	89	1/4	6.4	2-3/4	70

Wiping Cloths & Rags



AIM 46403-25	Bleached T-Shirt Rags (25 lbs)
AIM 46411-10	Washed & Bleached Cotton French Terry (10 lbs)
AIM 46411-50	Washed & Bleached Cotton French Terry (25 lbs)
AIM 46414-25	Washed & Bleached Cotton T-Shirt (25 lbs)
AIM 46415-10	Washed & Bleached Cotton T-Shirt (10 lbs)
AIM 46415-50	Washed & Bleached Cotton T-Shirt (50 lbs)
AIM 46416-50	Washed & Bleached Cotton T-Shirt (50 lbs)
AIM 46418-10	Washed Colored Cotton Knit T-Shirt (10 lbs)

Fiberglass Paint Arrestor Filter Pad

- Thin glass fiber backing
 - High efficiency at a low cost
 - Traps paint overspray particles
 - Prevents build up on exhaust vents
- AFT 14AGP2025H50**



Series 55 Tacky Intake Panel

- Economical solution for crossdraft intake filtration in paint spray booths in automotive & industrial finishing markets
- 75% efficiency on 10 microns
 - 2 layers, 100% polyester with downstream tackifier
 - Heat sealed to 9 gauge internal support frame
- AFT 14AGP2025H50**

ATD 9-Piece HVLP Spray Gun Set

Everything you need to start painting!
Kit includes 1.8mm primer gun, 1.4mm topcoat gun, and 1.0mm touch-up gun, 0-180PSI regulator, 1L aluminum cups, 125cc stainless steel cup, face mask, and cleaning kit
ATD 6900



BINKS 2 Gallon Semi Rigid Poly Tank Liner

Semi Rigid Poly Tank Liner for 2 Gal. non-ASME 80# tanks (pre 2001)
BNK 6-228



Respirator Cleaning Wipes

70% Alcohol • Individually packaged and sealed
AIM 81002 (100/box)



2200N95/2300N95 Dura Mesh®, Softspun® Respirators

- Dura-Mesh® shell resists collapsing so workers use fewer masks
- Softspun® lining gives added comfort and durability
- Contour molded nose bridge seals easily without a metal nose clip to adjust
- N95 Classification
- MOL 2300 features an exhale valve to keep workers cooler longer

MLX 2200	Respirator, 20/box, 12 boxes/case (Med., Large)
MLX 2300	Respirator, 10/box, 10 boxes/case (W/Valve)



Respirator Complete

- 5500 Series Half Mask with (2) N75001 cartridges, (2) 7506N95 filters and (2) N750027 filter covers
- Easy to order, convenience packs combine the most commonly used gas and vapor cartridges and/or particulate filters with the 5500 series half mask to form a complete respirator
- Sizes: SM, MD, and LG



NTH 550030S	Respirator (Small) Mask Only
NTH 550030M	Respirator (Medium) Mask Only
NTH 550030L	Respirator (Large) Mask Only
NTH 5501N95S	Respirator (Small)
NTH 5501N95M	Respirator (Medium)
NTH 5501N95L	Respirator (Large)



Dual Cartridge Elastomeric Full Facepiece Respirator

- Full face respirator has the largest field of vision available at an economical price
- 200° field of vision hard coated polycarbonate lens protects the wearer's eyes and face against irritating gases, vapors and flying particles
- Made of rubber not silicone

NTH 54001S	Elastomeric Full Face Respirator (Small)
NTH 54001	Elastomeric Full Face Respirator (Med/Large)



Replacement Cartridge & Filters



NTH 7580P100



NTH N75001



NTH N750036



NTH 75FFP100NL

NTH N75001	Cartridge
NTH 75FFP100	Pancake Filter
NTH N750036	Retainer Caps
NTH 7580P100	Particulate Filter

Pair
2 Pack
2 Pack
Each



1/4" Hex Air Screwgun

- Balanced design offers easy handling and control to reduce operator fatigue
- 1/4" Hex quick change
- Teasing throttle, conveniently located reverse
- Torque Range up to 100 in. lbs. • Handle exhaust with muffler

	Clutch	Free Speed	Size
PPT SG1200AC	Adjustable	1200 RPM	1/4"
PPT SG1200PC	Positive	1200 RPM	1/4"
PPT SG1200VC	Versa	1200 RPM	1/4"
PPT SG2200AC	Adjustable	2200 RPM	1/4"
PPT SG2200PC	Positive	2200 RPM	1/4"
PPT SG2200VC	Versa	2200 RPM	1/4"
PPT SG3000AC	Adjustable	3000 RPM	1/4"
PPT SG3000PC	Positive	3000 RPM	1/4"
PPT SG3000VC	Versa	3000 RPM	1/4"



Air Drills

- Ergonomically designed housing
- Teasing throttle and gull ball and needle bearing construction for quiet operation
- Designed for long life

	Type	Free Speed	Size
PPT DR0280R1	Reversible	280 RPM	1/2"
PPT DR0500R1	Reversible	500 RPM	1/2"
PPT DR0800N1	Non-Reversible	800 RPM	1/2"
PPT DR1500R3	Reversible	1500 RPM	3/8"
PPT DR2600N1	Non-Reversible	2600 RPM	1/2"
PPT DR2600N3	Non-Reversible	2600 RPM	3/8"
PPT DR2800	Non-Reversible	2800 RPM	3/8"
PPT DR2800R3	Reversible	2800 RPM	3/8"
PPT DR3500N1	Non-Reversible	3500 RPM	1/2"
PPT DR3800	Reversible	1800 RPM	3/8"

Air Tool Oil

- Specially engineered for the care of all piston-type and rotary air tools
- Prevents rust formation while providing positive lubrication for longer tool life and smoother starting
- Ensures maximum output and top performance by dissolving the gums and sludges that rob tools of speed and power

MVL MM080R



Angled Die Grinders

- Advanced Composite Housing
- Adjustable Rear Exhaust
- Cushioned Comfort Grip
- Built-in Power Regulator
- Air Inlet: 1/4 in
- Minimum Hose Size: 3/8 in

Heavy Duty Angle Die Grinder

Free Speed: 18,000 RPM
Rated Power: 0.75 hp

NP 709A

Angle Die Grinder

Free Speed: 20,000 RPM
Rated Power: 0.3 hp

NP 701A

Offset Angle Die Grinder

Free Speed: 18,000 RPM
Rated Power: 0.3 hp

NP 711



FUSE 1715Q SERIES

Safety Glasses

- Scratch resistant coating
- ANSI Z87.1-2003 standard certified

LIB 1715Q-C (Clear)

Latex Exam Gloves

- Industrial grade
- 5 mil thick
- Ambidexterous
- 100 gloves per box

LIB 2800W Pre-Powdered Latex S, M, L, XL

LIB 2810W Powder-Free Latex S, M, L, XL



Yellow Flock Lined Latex

- Embossed grip on palm and fingers
- 12" Length
- 100 gloves per box

LIB 2870SL 18 mil S, M, L, XL

LIB 2874SL 20 mil S, M, L, XL



Adjustable Head Band Ear Muff

- Foam filled, padded ear cups fit securely and comfortably over the ear
- Adjustable nylon headband slides and large soft foam ear cups to fit all sizes
- Lightweight and durable construction
- Noise Reduction Rating (NRR): 25dB
- Comply to ANSI S3.19

LIB 1425Y



Orange Masking Tape - High Performance

- Designed specially for the marine and composites industry
- Specially formulated adhesives provide excellent adhesion to semi-permanent mold release agents
- Smooth crepe saturated backing is designed to withstand chemical factors in polyester molding environments

AMT OM-34	3/4" x 60 YD
AMT OM-1	1" x 60 YD
AMT OM-112	1-1/2" x 60 YD
AMT OM-2	2" x 60 YD



Nylon Cable Ties

- Faster - low insertion and pull through force
- Stronger - high tensile strength is achieved from one piece, advanced pawl, and teeth design
- Purer - manufactured from filtered nylon reducing particle contamination
- Safer - rounded edges provides added safety and eliminates insulation damage
- Consistent - formulated molding processes

Part No.	Length	Tensile Strength	Color	Qty/Bag	Qty/Case
TI RT-350	4.1"	18 lb	Natural	1,000	10,000
TI RT-350-BLK	4.1"	18 lb	UV Black	1,000	10,000
TI RT-508-BLK	8.8"	40 lb	UV Black	1,000	10,000
TI RT-550	5.8"	40 lb	Natural	1,000	10,000
TI RT-550-BLK	5.8"	40 lb	UV Black	1,000	10,000
TI RT-675	7.5"	40 lb	Natural	1,000	10,000
TI RT-675-BLK	7.5"	40 lb	UV Black	1,000	10,000
TI RT-1100-BLK	11.25"	50 lb	UV Black	500	5,000
TI RT-1400	14.25"	50 lb	Natural	500	5,000
TI RT-1400-BLK	14.25"	50 lb	UV Black	500	5,000
TI RTH-1400	15"	120 lb	Natural	100	2,000
TI RTH-1400-BLK	15"	120 lb	UV Black	100	2,000
TI RTV-2400-BLK	25.2"	175 lb	UV Black	50	500
TI RTV-3600-BLK	37.2"	175 lb	UV Black	50	500

With Mounting Hole	Length	Tensile Strength	Color	Hole Size	Qty/Bag	Qty/Case
TI RTM-1100-BLK	11.25"	50 lb	UV Black	No. 10	100	5,000
TI RTM-1400	14.5"	50 lb	Natural	No. 10	100	5,000
TI RTM-1400-BLK	14.5"	50 lb	UV Black	No. 10	100	5,000
TI RTM-675	8.0"	50 lb	Natural	No. 10	1,000	5,000
TI RTM-675-BLK	8.0"	50 lb	UV Black	No. 10	1,000	5,000
TI RTHM-1400	15.7"	120 lb	Natural	1/4"	100	2,000
TI RTHM-1400-BLK	15.7"	120 lb	UV Black	1/4"	100	2,000

Marine Grade Hose Clamps

- Marine grade clamp
- All 300 grade stainless steel for greater resistance to corrosion
- Ideal recommends at least an all 300 grade clamp for marine applications.

TRIDON



Part No.	Min. Dia. (in.)	Max. Dia. (in.)	Fits Hose I.D. Min. (in.)	Fits Hose I.D. Max. (in.)
HC 1004-M	1/4	5/8	1/8	5/16
HC 1005-M	1/4	11/16	1/8	3/8
HC 1006-M	5/16	7/8	1/4	7/16
HC 1006-P	3/8	7/8	5/16	3/8
HC 1008-P	7/16	1	5/16	1/2
HC 1010-P	1/2	1-1/16	3/8	5/8
HC 1012-P	1/2	1-1/4	3/8	3/4
HC 1016-P	11/16	1-1/2	3/4	7/8
HC 1020-P	3/4	1-3/4	3/4	1-1/8
HC 1024-P	1	2	7/8	1-3/8
HC 1028-P	1-1/4	2-1/4	1-1/4	1-5/8
HC 1032-P	1-1/2	2-1/2	1-1/2	1-7/8
HC 1036-P	1-3/4	2-3/4	1-3/4	2
HC 1052-P	2-3/4	3-3/4	2-3/4	3
HC 1064-P	2-1/2	4-1/2	2-1/2	4
HC 1072-P	3	5	3	4-1/2

Roller Covers

- Made from the highest quality materials, including natural, woven fabric and knit fabric
- Plastic (PVC) or Solvent-resistant Phenolic Cores
- Top quality synthetic blend materials are spiral wound onto cores
- Covers are combed and vacuumed for clean, uniform application
- Edges are accurately beveled for neater painting

CORONA
Brushes & Rollers



Mohair



Polyester

Roller Cover	Length	Nap	Material
RC 4D38	4"	3/8"	Woven Polyester
RC 7C-Y	7"	3/16"	White Woven
RC 9C	9"	3/8"	Woven Polyester
RC 9C-Y	9"	3/16"	White Mohair
RC R-101-F-9	9"	1/8"	Woven Mohair Blend
RC R-101-F-4	4"	1/8"	Woven Mohair Blend
RC R-101-F-7	7"	1/8"	Woven Mohair Blend
RC R-201-F-4	4"	1/4"	Glass Coated Polyester
RC R-201-F-7	7"	1/4"	Glass Coated Polyester
RC R-201-F-9	7"	3/8"	Glass Coated Polyester

Roller Frames

Heavy-duty use. Threaded plastic handle with metal ring. Five-wire birdcage, 5/16" diameter steel shank.

RC 4H	4" Roller Frame
RC 7H	7" Roller Frame
RC 9H	9" Roller Frame



NESCO

Solar Powered Auto Darkening Welding Helmets with Large Viewing Area

Durable, Light Weight, Corrosion Resistant, Flame Retardant

- Ultra high performance filters protects against UV and IR • Automatically changes from a light to a dark state when arc is struck • Returns to normal when welding stops with dark to clear adjustments available • Variable shades from DIN 9 to DIN 13
- Outside sensitivity adjustments provides clear vision both prior and during welding
- Special turnover head band mechanism allows for greater comfort and reduces fatigue • Utilizes high performance solar cells with 2 built-in 3V lithium batteries as power back-up • Complies with DIN, ISO, EN safety standards and ANSI Z87.1-2003 standards • Viewing Area: 3.86" x 2.17"

Flame Graphics
NG 4652



Skull Graphics
NG 4653



American Eagle
NG 4654



23" Fine Blue Bruske Broom with Handle

- No-shed bristles are not affected by acids, alkalines, or most solvents
- Keeps its shape and never sags or mats in wet or dry conditions

BRU 2134SH

Corn/Yucca Blend Broom with Wood Handle

- 55" overall length
- For light-duty sweeping
- Five rows of stitching

BWK 926Y

